

Fanless, small form factor,  
DVI-D, USB and audio

## ADDERLink X-DVI PRO


Digital video extender with USB2.0 over a single cable



### PRODUCT IN BRIEF

AdderLink X-DVI PRO is a high performance KVM (Keyboard, Video and Mouse) extender that enables you to locate your critical computing hardware in a secure and temperature controlled environment, away from the user workstation environment, whilst maintaining the same user experience. It can transmit a Single Link DVI video stream, USB2.0 and analog audio over a single CATx cable.

- Plug and play
- 50m / 164ft extension distance
- 1920x1200 @60Hz maximum resolution
- USB2.0 Low and Full speed
- Keyboard, mouse tablet and touch

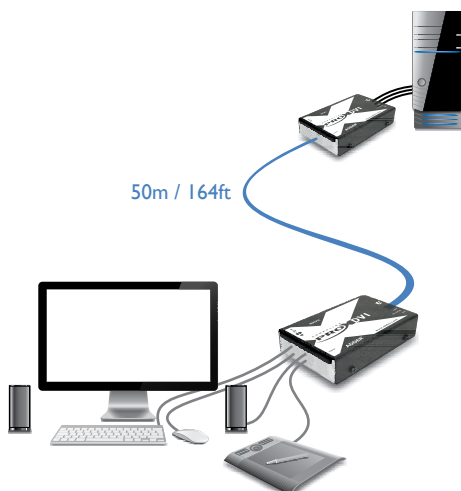

### FEATURES

#### Perfect digital video, real time control

The AdderLink X-DVI PRO extender uses an uncompressed system whereby every pixel of every frame are sent without loss. HDMI video and audio can be extended with the correct adapter cable, although HDCP and CEC are not supported.

#### 50m / 164ft over a single CATx cable

Video, USB2.0 (Low and Full speed) and audio all pass along a single cable, providing up to 50m / 164ft of extension. Distance is dependent upon video resolution, the CATx cable type, and the number of connection breaks for patch panels and wall plates. See table on reverse for details.

#### USB2.0

Utilising a unique method of USB communication, the X-DVI PRO extenders deliver the highest possible levels of USB compatibility. All USB 1.1 and 2.0 low/full speed devices are supported.

#### Power efficiency

The X-DVI PRO extender is designed to be highly power efficient and run with the minimum of input. In fact, the transmitter unit is so energy efficient that it can be powered solely from the host computer's USB connection.

#### EDID management

The system has intelligent EDID management to allow the true characteristics of the monitor to be passed back to the computer.

#### Plug and Play

X-DVI PRO extenders are delivered in a zero config state so you can plug them in and start working with them straight away. There's no need for drivers or software to be installed.

#### Analog audio

Stereo CD quality (stereo channel 16 bit sampled at 44.1kHz) is available to transfer audio from local to remote for line out.

#### Digital audio

Supports 8 channels of HDMI audio simultaneously with analog audio.

#### Built to last

Adder Technology have a well-earned reputation for creating products that perform well and stay the course. The X-DVI PRO extender units are no exception and feature tough metallic enclosures to ensure they can easily withstand everyday treatment. The internal components and external connectors too are selected for their reliability in addition to their performance characteristics.

# ADDERLink X-DVI PRO

Digital video extender with USB2.0 over a single cable

## ABOUT ADDER

Adder is a leading developer and thought leader in connectivity solutions. Adder's advanced range of high performance KVM switches, extenders and IP solutions enable the control of local, remote and global IT systems across the enterprise. The company distributes its products in more than 60 countries through a network of distributors, resellers and OEMs. Adder has offices in China, Germany, Japan, the Netherlands, Singapore, Sweden, United Kingdom and the United States.

To find out more, visit:  
<http://www.adder.com>

## TECHNICAL SPECIFICATIONS

### Hardware compatibility

All computers with DVI-D, USB and audio - requirement dependent.

### DVI-D Interface – digital only

The system supports resolutions to a maximum of 1920x1200 @60Hz.

### USB2.0 Low and Full speed

Transparent USB2.0 (Low and Full speed) that supports HID and mass storage devices to a maximum of 50m / 164ft. You may need to reduce maximum cable length by 5m / 16ft if a USB hub is connected to the receiver unit.

### Audio

The system delivers analog stereo audio (Line Out). 8 channels of HDMI audio are supported with sample sizes of 16, 20 or 24 bits at 32kHz, 44.1kHz, 48kHz, 88.2kHz, 96kHz, 176.4kHz, or 192kHz (simultaneously with the jack audio).

### Software compatibility

All known operating systems.

### Connections

#### Transmitter (TX)

DVI, Audio 3.5mm x 2, USB type-B, Options port (6p6c), Ethernet port (8p8c), Peripheral connections.

#### Receiver (RX)

DVI, Audio 3.5mm (line in and out), Audio 3.5mm (mic in and headphones), USB type-A x 4, Options port (6p6c).

### Physical design

Compact case, robust metal construction 120mm / 4.7" (w) x 75mm / 3" (d) x 26mm / 1" (h) 320g / 0.7 lb.

### Power

Rx: 2.5mm DC jack (power adapter included), 100-240VAC 50/60Hz, 0.4A, input to power adapter, 5VDC 12.5W output from power adapter.

Tx: Powered from single USB connection. Optional 2.5mm DC jack (power adapter not included).

### Operating temperature

0 to 40°C / 32 to 104°F

### Approvals

CE, FCC

## ORDERING INFORMATION

X-DVIPRO-XX: Pair including TX and RX units

XX = Mains Lead Country Code:  
UK = United Kingdom  
US = United States  
EURO = Europe  
AUS = Australia

## ADDITIONAL ACCESSORIES

X-RMK-FASCIA: Rack mount plate with screws included  
X-RMK-CHASSIS: Rack mount chassis  
VSCDI1: HDMI to DVI cable

## Important extension distance details

Recommended cables are CAT7 shielded foiled twisted pairs:

Daetwyler 7702 Flexible patch cable  
Daetwyler 7120 Bulk cable  
Category 5 (or better) shielded twisted pair cable must be used to connect the local and remote units in order to maintain compliance with radio frequency energy emission regulations and ensure a suitably high level of immunity to electromagnetic disturbances.

Resolution (@60Hz)	Cable type	Patch connections	Total distance
1920x1200	CAT7	0	50m / 164ft
1920x1200	CAT6a*	0	50m / 164ft
1680x1200	CAT5e*	0	50m / 164ft
1920x1200	CAT7	2	40m / 131ft

\* Shielded

### Notes:

Distances are achieved using single lengths of trunk/bulk cable. For each break/patch connection, reduce distance by 5m / 16ft. Preferably patch cables should be of type CAT7a and less than 2m / 6ft. Patch cables over 2m / 6ft must be CAT7a. CAT5e is not recommended for use with this system. The maximum extension distance for USB is 50m / 164ft including connections to and from the X-DVIPRO independent of cable type. If a USB hub is connected to the RX unit, this is seen as 5m / 16ft of cable length. This needs to be taken into consideration when planning your system.

## RELATED PRODUCTS

Adder offer a vast range of products to suit your needs. Other products you may find useful are:

ADDERLink  
X-DVI PRO Multiscreen



ADDERLink X-USB PRO  
X-USBPRO



ADDERLink X-50  
X50



ADDERLink INFINITY  
ALIF1000P, ALIF1000T,  
ALIF1000R



© Copyright 2018 Adder Technology Ltd. All brand names and trademarks are the property of their respective owners. X-DVIPRO\_v5.indd